

FR + L (2 Pcs.)
(Combination + Lubricator)





Features

- ▶ Zinc Pressure Die Cast Standard Grade with Powder Coated Body
- ▶ Comfortable to all industrial use
- ▶ Mounting Available
- ▶ Heavy Design & Rugged Use
- ▶ Precise Regulating Lubrication
- ▶ Type of Oil to be used ISO VG32

Technical Specification

| Model | F01 | F02 |
|-----------------|------------------------|------|
| Size | 1/4" | 1/2" |
| Pressure | Upto 16 BAR | |
| Temperature | Upto 60 °C | |
| Leakage | Bubble Tight | |
| Recommended Oil | ISO VG32 or Equivalent | |
| Media | Compressed air | |

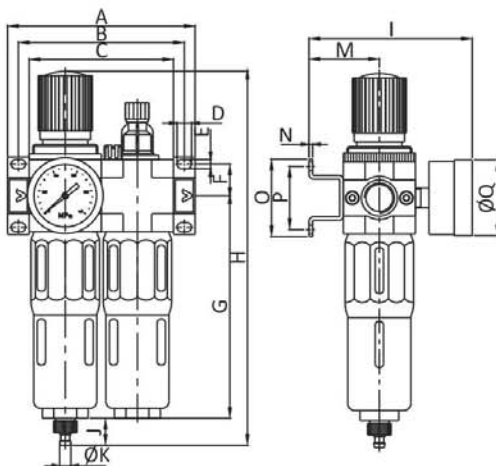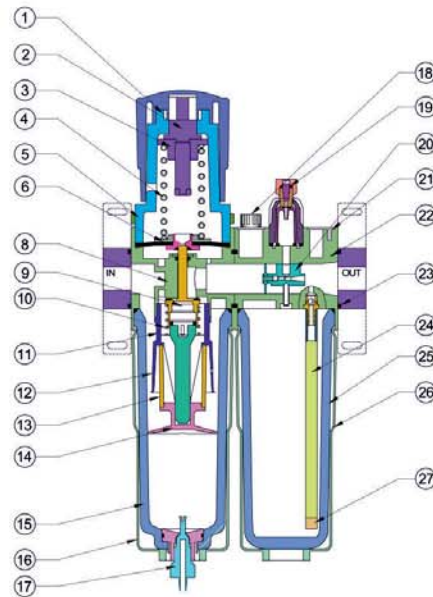

| No. | Part Name | Material | No. | Part Name | Material |
|-----|--------------------|------------------------|-----|-------------------|------------------------|
| 1 | Knob | Nylon | 14 | Baffle | Nylon |
| 2 | Adjusting Stud | Steel Plated | 15 | Bowl | Poly Carbonate |
| 3 | Nut | Steel Plated | 16 | Guard | Aluminum |
| 4 | Adjusting Spring | Spring Steel | 17 | Drain Cock | Nylon |
| 5 | Valve Cover Bonnet | Nylon / GP / PC | 18 | Oil Plug | Nylon |
| 6 | Diaphragm | NBR | 19 | Indicator Dom Set | Poly Carbonate |
| 7 | Side Connector | Zinc Pressure Die Cast | 20 | Distributor | Nylon |
| 8 | FR Body | Zinc Pressure Die Cast | 21 | Cover | Nylon |
| 9 | Plunger | Brass | 22 | Body | Zinc Pressure Die Cast |
| 10 | Bottom Spring | S. Steel | 23 | 'O' Ring | NBR |
| 11 | Deflector | Nylon | 24 | Oil Tube | P.U. / Nylon |
| 12 | Guide | Nylon | 25 | Bowl | Poly Carbonate |
| 13 | Filter Element | Sinter Bronze | 26 | Guard | Aluminum |
| | | | 27 | Filter Element | Sinter Bronze |

Dimensions :

(All Dimensions are in mm)

| MODEL | SIZE | A | B | C | D | E | F | G | H | I | M | N | O | P | ØQ | J | ØK | Weight (Kg.) Approx. |
|-------|------|-----|-----|----|-----|-----|------|-------|-------|------|----|---|----|----|----|----|-----|-------------------------|
| F014 | 1/4" | 104 | 92 | 80 | 8 | 5 | 17.5 | 123.5 | 207.5 | 90.5 | 39 | 2 | 43 | 35 | 42 | 15 | 6.2 | 0.898 |
| F025 | 1/2" | 140 | 125 | 98 | 8.5 | 5.5 | 25 | 152.5 | 267 | 110 | 47 | 3 | 74 | 60 | 52 | 15 | 6.2 | 2.015 |